



TLF236 range at high level of protection degree for indoor and outdoor use. The different executions offer a complete range of products for the various installation demands.

Fluorescent

## CONSTRUCTION DATA

- Body: Injected polycarbonate body, Recyclable and Unbreakable.
- Lens: Polycarbonate diffuser, UV resistant and shockproof.
- Reflector: Gear tray reflector in white painted steel.
- Clips: Stainless steel clips.
- Optional upon client's request: Emergency kit

## APPLICATION

- Industrial
- Commercial



## Specifications:

- Lamps:
  - 18W
  - 36W
  - 58W
- IP65 Protection
- Available with electronic and magnetic ballast.
- Stainless Steel Clips.

On Request:

\*Thermo plastic clips.

# TLF236

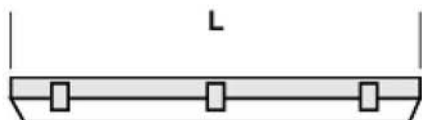

**IP65**
**IK09**


 Max 5.75Kg

## INSTALLATION

Quick installation. Mounting: individual or in-line.

Separate access to ceiling clips possible via hatch in the packaging

Easy click installation

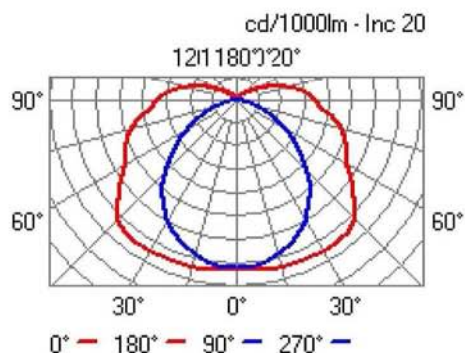

Order Code	Description	Lamp Type & Rating	Gear	Weight (kg)	L	W	D
TL118	T8 600mm	1x18W T8	HF	1.7	610	105/162	105
TL 218	T8 600mm	2x18W T8	HF	1.4	610	105/162	105
TL 136	T8 1200mm	1x36W T8	HF	2.7	1210	105/162	105
TL 236	T8 1200mm	2x36W T8	HF	2.9	1210	105/162	105
TL 158	T8 1500mm	1x58W T8	HF	2.8	1510	105/162	105
TL 258	T8 1500mm	2x58W T8	HF	4.2	1510	105/162	105

Fluorescent