



## H.I.D.FLOODLIGHT

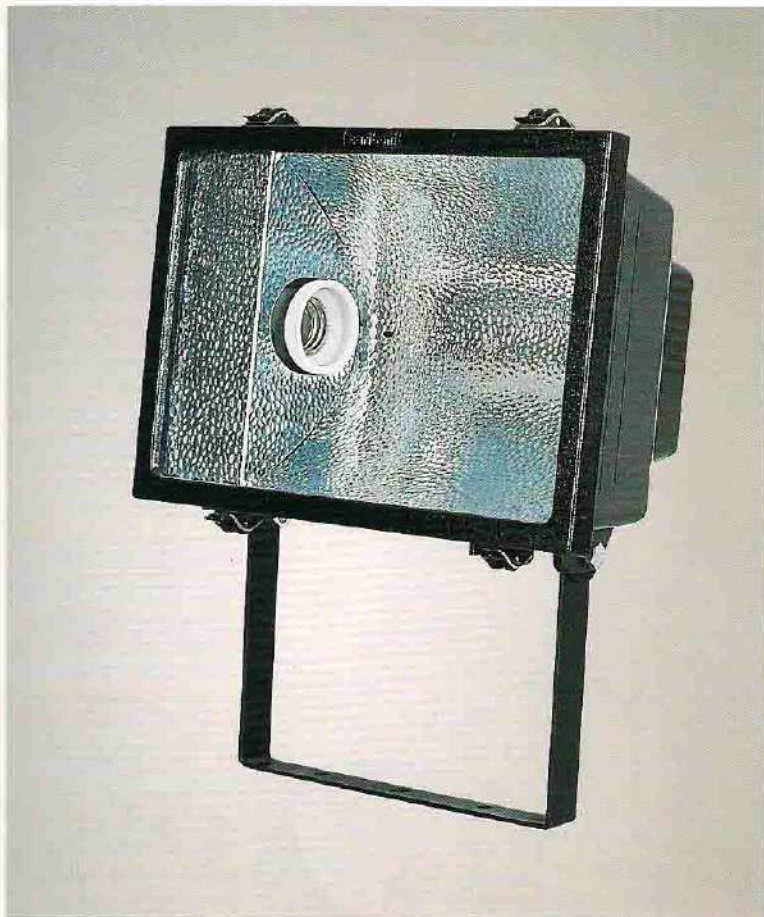

### BHF-2009

Symmetrical light distribution  
 Max Watt: 400w  
 IP Rating: IP65  
 Lamp holder model: E40  
 Packing: IPC/ctn(41x34x30cm)

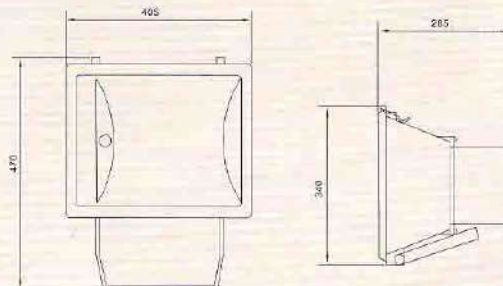

### Floodlight

1. The lamp body and frame are of high voltage aluminium alloy die-casting forming with firm and handy structure.
2. The surface of the lamp body and frame have been treated with anti-corrosion electro-static spray and coating.
3. The safety hardened glass is plain and pervious to light. It has sound anti-shock property and high luminousness.
4. High-purity aluminium reflector housing has been anodized. In this way, it greatly enhances the usage of light-beams.
5. The joint face between lamp base and frame adopts heat-resistant silicon rubber sealing. As a result, it prevents from rain and dust.
6. The lamps are allocated with dial scale and U type iron whose angle can be wantonly adjusted for the purpose of reaching the finest projection result.

### BHF-2009E

Symmetrical light distribution  
 Max Watt: 400W  
 IP Rating: IP65  
 Lamp holder model: E40  
 Packing: IPC/ctn(40x34x30.5cm)

