



H.I.D. FLOODLIGHT

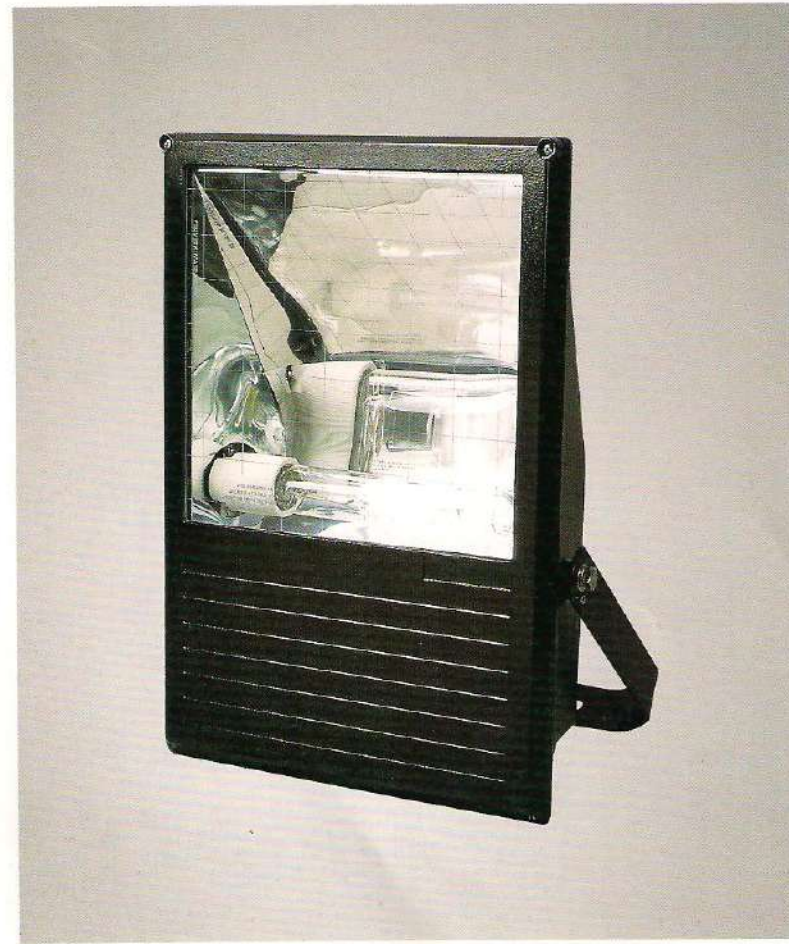

BHF-2011

Asymmetrical light distribution
 Max Watt: 400W
 IP Rating: IP65
 Lamp holder model: RX7S
 Packing: IPC/ctn(43.5x15x60cm)

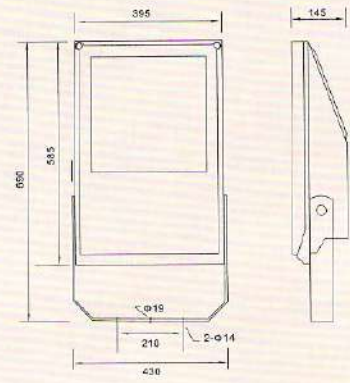

Floodlight

1. The lamp body and frame are of high voltage aluminium alloy die-casting forming with firm and handy structure.
2. The surface of the lamp body and frame have been treated with anti-corrosion electro-static spray and coating.
3. The safety hardened glass is plain and pervious to light. It has sound anti-shock property and high luminousness.
4. High-purity aluminum reflector housing has been anodized. In this way, it greatly enhances the usage of light-beams.
5. The joint face between lamp base and frame adopts heat-resistant silicon rubber sealing. As a result, it prevents from rain and dust.
6. The lamps are allocated with dial scale and U type iron whose angle can be wantonly adjusted for the purpose of reaching the finest projection result.

BHF-2011-1

Asymmetrical light distribution
 Max Watt: 400W
 IP Rating: IP65
 Lamp holder model: E40
 Packing: IPC/ctn(43.5x15x60cm)

20

