



The TLFL2004 flood is a versatile unit that can be used in larger residential or light commercial applications such as housing or office/retail complex.

TECHNICAL INFORMATION:

Body: Die cast aluminum alloy (UNI5076) with epoxy powder coating.

Reflector: High purity aluminum sheet (UNI 9001/4) anodized and polished.

Closure: Tempered front glass, thermal shock resistant.

Lamp Holder: E40 screw socket type.

APPLICATION:

- Facades
- Parks
- Architectural areas



Accessories



Protection Grid




Steel Screen




Deflector Screen

INSTALLATION:

Direct mounting of light with bracket.

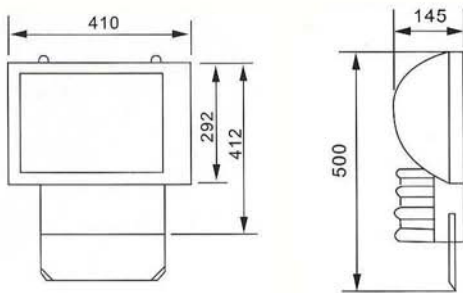

Light distribution curve

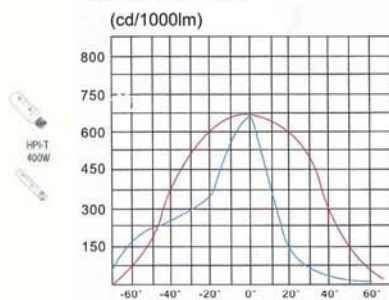

MAINTENANCE:

Access of lamp from the front by removing 2 toggle clamps.

Code	Holder Type	Wattage	Lamp Type	IP Rating	Gross Weight
20041	E40	70W	M H	IP65	8.2
20042	E40	150W	M H	IP65	8.8
20043	E40	250W	M H	IP65	10.0
20044	E40	400W	M H	IP65	10.6
20046	E40	70W	HPS	IP65	8.2
20047	E40	150W	HPS	IP65	8.8
20048	E40	250W	HPS	IP65	10.0
20049	E40	400W	HPS	IP65	10.6