
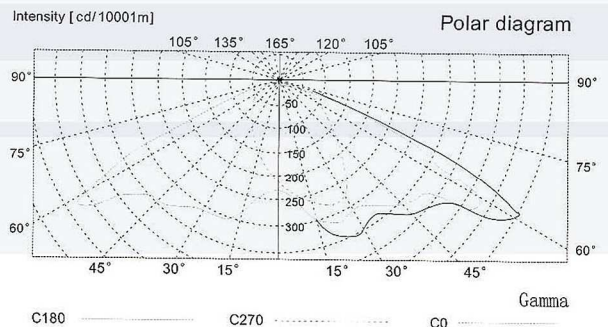
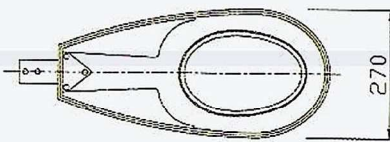
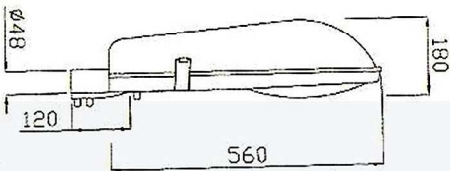


TLRD-ST-005B

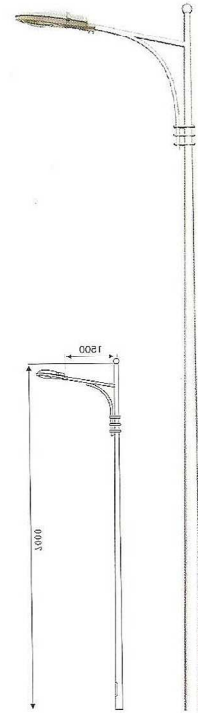

Structural Characteristic :

- 900t die casting aluminum housing, with high intensity, concise structure and streamline outline
- Hi-purity aluminum reflector, polished and anodized
- Temper glass lens, with the characteristic of good transparency, high temperature resistant and uniform light
- Lens and shell connected with stainless steel hardware, easy to install and maintain
- Sealed with foamed silicon rubber, with excellent waterproof and dustproof performance

Technical Parameters :

- IP rating: IP65
- Level of Corrosionproof: II
- Working environment: -35°C--+45°C
- Electric shockproof rating: I
- Lampholder: E40
- Voltage: 110V-130V/60Hz 220V-240V/50Hz
- Illuminant: 70-250W HPS/MHL/Mercury lamp