



Street Light

Technical specification:

Body: Die cast aluminum alloy UN 5076, cover – UV resistant technical polymer with RAL 7035 Polyester powder coating.

Mounting: Pole top Ø60

Diffuser: Tempered heat resistant glass.

Lamp Holder: White porcelain with screw socket type E40.

Control Gear: Top Lift cover for easy access.

Lamp: High Pressure Sodium or Metal Halide.

Protection Degree: IP65 Optic, IP45 Wiring chamber.

Insulation Class: I.

Application:

- Minor roads
- Residential areas
- Car parks








 Surface Area: 0.036 m²

Accessories



Installation:


On wall bracket Ø42-60 mm

On straight lamp post or side arm with spigot Ø60 mm

4 to 8 m depending on the light source used


Maintenance:

Top-lift cover for easy repair and maintenance

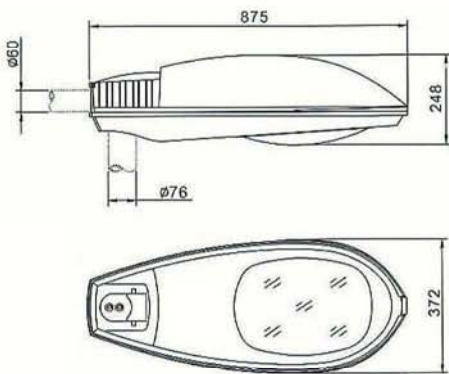

Polar diagram
Intensity [cd/1000lm]

Polar diagram

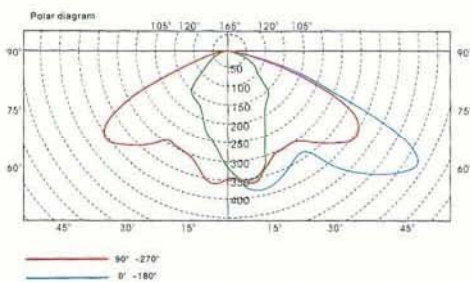

Code	Lamp Type	Wattage	Lamp Type	IP Rating	Gross Weight
0072	E40	70W	MH	IP65	7.6
0073	E40	150W	MH	IP65	8.5
0074	E40	250W	MH	IP65	9.8
0075	E40	400W	MH	IP65	12.0
0077	E40	70W	HPS	IP65	7.6
0078	E40	150W	HPS	IP65	8.5
0079	E40	250W	HPS	IP65	9.8
00711	E40	400W	HPS	IP65	12.0