



Technical specification:

Body: Die cast aluminum alloy UN 5076, cover – UV resistant technical polymer with RAL 7035 Polyester powder coating.

Mounting: Pole top Ø60

Diffuser: Tempered heat resistant glass.

Lamp Holder: White porcelain with screw socket type E40.

Control Gear: Top Lift cover for easy access.

Lamp: High Pressure Sodium or Metal Halide.

Protection Degree: IP65 Optic, IP45 Wiring chamber.

Insulation Class: I.

Application:


- Minor roads
- Car parks
- Residential areas








IP65 Surface Area: 0.025 m²

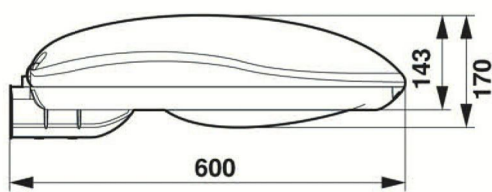

Installation:

On wall bracket Ø42-60 mm

On straight lamp post or side arm with spigot Ø60 mm


3 to 8 m depending on the light source used

Maintenance:

Stainless steel buckles with spring for operation

Top-lift cover for easy repair and maintenance

Light distribution curve



Code	Holder Type	Wattage	Lamp Type	IP Rating	Gross Weight
00152	E40	70W	M H	IP65	6.2
00154	E40	150W	M H	IP65	7.1
00157	E40	70W	HPS	IP65	6.2
00159	E40	150W	HPS	IP65	7.1