



TLFL1500A

### Applications

- Buildings
- Mines
- Construction Site
- Airports

### Features

**Operating Voltage:** 110-130V/60Hz,  
220-240V/50Hz

**Power:** 1000 – 1500W



**Lamp:** E39

**Dimension:** 520 x 420 x 180mm

**Materials:** Aluminum

**IP rating:** IP65

### Dimensions

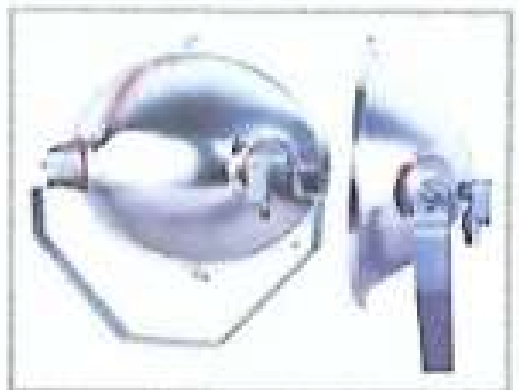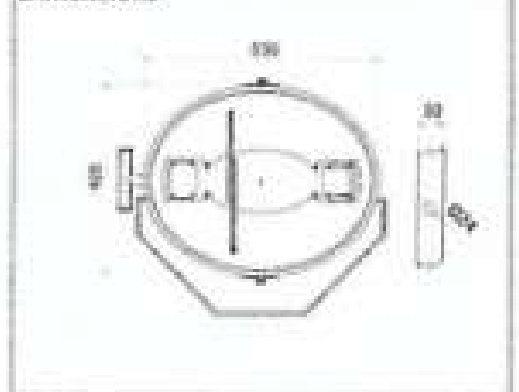

- Floodlight with OT1070 aluminum reflector.
- With external grit blast treatment on the surface. High anti-corruption property.
- 5mm tempered glass. Shock resistance and high light transmittance.
- Heatproof silicon sealing gasket.no-aging and good sealing property.
- 4x1000w light in the mobile tower could illuminate greater than 4000 M<sup>2</sup> and average 20 lux.
- Hot galvanizing metal bracket
- Stainless steel clips, easy for installation and maintenance.